

TUBE SERIES CONVEYORS

USC's TS conveyors combines the gentleness of our SS conveyor with the traditional stability of a tube-style conveyor, creating the only conveyor designed specifically with seed in mind!

FEATURES & ADVANTAGES

- Most gentle conveyor designed specifically for seed.
- Re-engineered belt eliminates pinch points commonly found in other tube-style conveyors.
- Increased capacity with same belt width.
- Increased structural stability on lengths 40' and greater.
- Built-in tow hitch to easily transport.
- Inlet conveyor cover.
- Convenient cleanout door at inlet.



TUBE SERIES CONVEYORS

TS CONVEYOR OPTIONS

LENGTH OPTIONS:

- 12', 15', 17', 32', 37' and 42' with stand.
- 20', 25', 30', 35', 40' and 45' with undercarriage or stand.

ALL TS CONVEYORS:

- Collapsible hopper.
- Seed ladder (standard on 45').
- 24" re-bagging spout.
- Stand or undercarriage.
- 65' electrical cord and plug.

TS2500 CONVEYOR:


- 8" tube-style design.
- 12" wide cleated belt.
- 10" diameter discharge spout.
- 5HP motors on 12' to 35'.
- 7.5HP motors on 40' and 45'.
- 2,500 lb./min. at 30°

TS3500 CONVEYOR:

- 10" tube-style design.
- 16" wide cleated belt.
- 10" diameter discharge spout.
- 7.5HP motors on all lengths.
- 3,500 lb./min. at 30°



CONVEYOR INLET

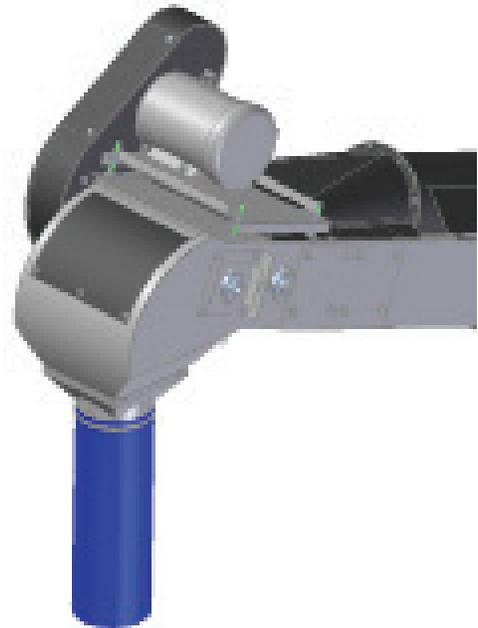

CONVEYOR DISCHARGE